



12FGHL380

12Volt 110Ah

Specifications

Nominal Voltage(V) **12V**

Nominal Capacity

10 hour rate	(11A	to	10.80V)	110Ah
5 hour rate	(18.7A	to	10.20V)	93.5Ah
1 hour rate	(66A	to	9.60V)	66Ah
1 C	(110A	to	9.60V)	69.67Ah

Weight **Approx. 32.5kg(71.5Lbs.)**

Internal Resistance (at 1KHz) **Approx. 5 mΩ**

Maximum Discharge Current for 5 seconds: **1200A**

Charging Methods at 25 (77)

Cycle use:

Charging Voltage **14.4 to 15.0V**

Coefficient -5.0mV/ /cell

Maximum Charging Current : **33A**

Standby use:

Float Charging Voltage **13.5 to 13.8V**

Coefficient -3.0mV/ /cell

Operating Temperature Range

Charge **-15 (5) to 40 (104)**

Discharge **-15 (5) to 50 (122)**

Storage **-15 (5) to 40 (104)**

Charge Retention (shelf life) at 20 (68)

1 month **98%**

3 month **94%**

6 month **85%**

Case Material **ABS**

(UL94 HB flame retardant)

Terminal **F8**

Description of torque value of hard ware for the terminals:

Recommended torque value **M6: 5.39 N-m (55kg-cm)**




Maximum allowable torque value **M6: 8.82 N-m (90kg-cm)**

Design Life **12 years**




Dimensions


mm(inch)

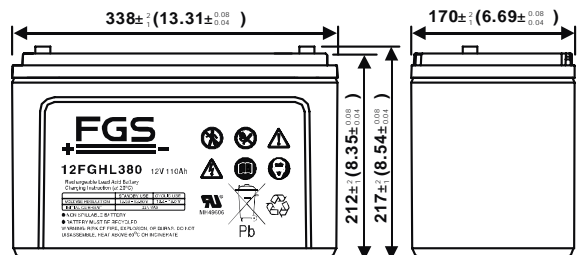


(v) Discharge Time VS. Discharge Current (25) FOR 12V BATTERY

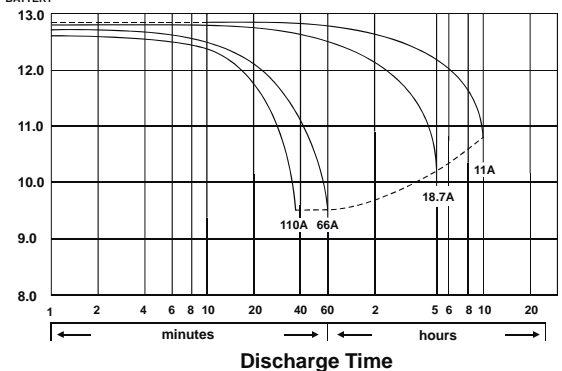


Effect of Temperature on Capacity 25°C(77°F)

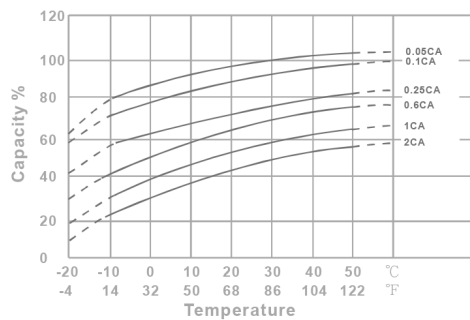


Capacity Retention Characteristic

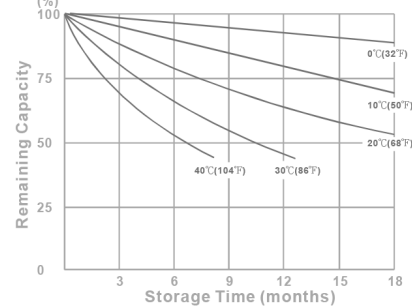

Trickle (or float) Service Life



Cycle Service Life

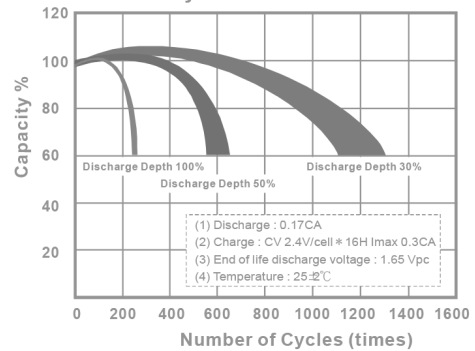

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time	min	2880	3202	3423	3634	3731	3833	4025
5	min	2145	2339	2498	2650	2715	2789	2920
10	min	1757	1904	2016	2124	2168	2229	2314
15	min	1075	1139	1193	1243	1265	1291	1332
30	min	711	738	756	773	780	789	800
60	min	505	531	550	566	573	582	594
90	min	414	435	450	459	465	472	481
120	min	301	317	328	339	343	348	355
180	min	240	253	265	277	281	286	292
240	min	211	225	235	240	243	245	249
300	min	136	139	141	144	145	146	148
600	min	70.3	72.2	74.2	75.5	76.0	76.6	77.4
1200	min							

- Discharge Rates in Amperes to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time	min	214	279	317	348	358	370	387
5	min	167	196	217	234	242	251	265
10	min	124	151	170	184	189	195	203
15	min	74.3	86.7	95.1	104	106	109	114
30	min	44.4	52.6	58.3	62.4	63.3	64.8	66.7
60	min	33.3	38.4	42.2	45.4	46.3	47.4	48.9
90	min	25.1	29.2	32.4	35.5	36.3	37.2	38.4
120	min	21.5	23.9	25.7	27.2	27.7	28.3	29.1
180	min	18.5	20.3	21.6	22.5	22.8	23.2	23.7
240	min	16.8	18.0	18.9	19.4	19.6	19.8	20.1
300	min	10.7	11.0	11.2	11.4	11.5	11.6	11.8
600	min	5.45	5.62	5.79	5.91	5.96	6.02	6.09
1200	min							

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)